



agriculture & rural development

Department:
agriculture
& rural development
PROVINCE OF KWAZULU-NATAL

INVITATION OF QUOTATION ABOVE R30,000.00

THIS FORM SHOULD BE COMPLETED IN DETAIL AND SHOULD BE ACCOMPANIED BY A **VALID TAX COMPLIANCE STATUS PIN AND VALID BBBEE VERIFICATION CERTIFICATE/AFFIDAVIT**

QUOTATION NUMBER: R/N/1819/941	VALIDITY PERIOD OF QUOTATION..... Days (To be completed by the Supplier)
CLOSING DATE: 20/09/2018 21/09/2018	CLOSING TIME: 11H00
DESCRIPTION(SPECIFICATION/S) OF ITEMS/ SERVICE REQUIRED CONSTRUCTION OF DIPPING FACILITY (GAZINI) AT UMHLABUYALINGANA SEE ATTACHED SPEC	COMPANY NAME: TEL NO: FAX NO: CONTACT PERSON: CSD REG NUMBER MAAA.....
DOES OFFER COMPLY WITH SPECIFICATION?	YES/NO (DELETE WHICH EVER IS NOT APPLICABLE)
DOES ARTICLE COMPLY WITH SABS SPECIFICATION? HAS IT BEEN INSPECTED BY SABS?	YES/NO YES/NO (DELETE WHICH EVER IS NOT APPLICABLE)
DELIVERY PERIOD AFTER INITIAL ORDER?	
IS THE PRICE FIRM	
WHERE ARE THE STOCK HELD? (PHYSICAL ADDRESS , PLEASE)	
QUOTATION PRICE INCLUDING VAT (VAT TO BE ADDED BY REGISTERED VAT VENDORS ONLY)	TOTAL: R
COMPANY OFFICIAL STAMP (COMPULSORY) SIGNATURE OF BIDDER DATE
NUMBER OF PAGES FAXED BACK TO THE DEPARTMENT BY THE SUPPLIER(Supplier to complete)

NB: DOCUMENT TO BE DEPOSITED AT THE BID BOX SCM-RICHARDS BAY OFFICE TENDER BOX . LOT 11634 OPPOSITE UMHLATHUZE SPORT CENTRE. NO FAXED QUOTATIONS WILL BE ACCEPTED

TEL: NUMBER **033 355 9633**
CONTACT PERSON **KHETHI GUMEDE**

NB: THE ATTACHED SBD4 & SBD9 FORMS MUST BE COMPLETED IN FULL. THIS QUOTATION COVER PAGE MUST BE COMPLETED AND RETURN WITH ALL YOUR QUOTATION DOCUMENT.

COMPANY NAME :
 ADDRESS :
 CONTACT PERSON :
 CONTACT NUMBER :
 FAX NUMBER :

LINE NO.	DESCRIPTION OR SPECIFICATION OF ITEM (Please be very specific and clear)	REQUIRED QUANTITY	UNIT PRICE EXCL. VAT		TOTAL PRICE	
			R	C	R	C
1.	Construction of Gazini diptank at Gazini Area. Refer to the attached specification.	1				
2.						
3.						
4.						
* LABOUR (IF APPLICABLE)						
*DELIVERY (IF APPLICABLE)						
TOTAL						
*ONLY APPLICABLE TO VAT REGISTERED SUPPLIERS 15% VAT						
TOTAL PRICE						

***VAT Registration No. (Supplier)**

When Required (Requester): 30 October 2018

Where Required (Requester): Gazini Diptank (Gazini Area)

Contact details of requester: 076 939 7285 / 076 941 7176

TEL : 0355929833

(COMPULSORY)


COMPANY STAMP

PRICES ARE VALID FOR 30 60 90 DAYS

Mark one Box (X)

SIGNATURE

DATE

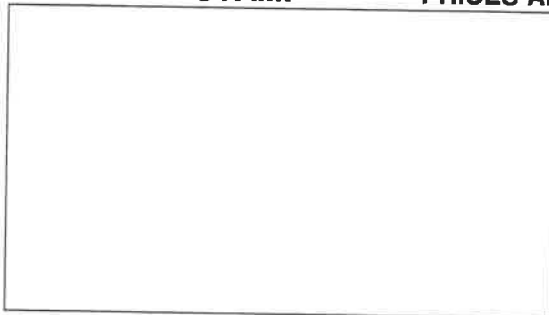



agriculture
& rural development

Department:
agriculture
& rural development
PROVINCE OF KWAZULU-NATAL

**CONSTRUCTION OF A DIP TANK (1X NEW
STRUCTURE) PLUS ANIMAL HANDLING
FACILITIES AT UMHLABUYALINGANA LOCAL
OFFICE
(Gazini Dip tank)**

PROJECT SPECIFICATIONS,
CONDITIONS OF CONTRACT AND
PRICING & PAYMENT SCHEDULES

August 2018

NO. OF DIPTANKS TO BE BUILT

1

REQUIRED CIDB GRADING

2CE

This document contains:



No.	Section	Pages
1	<i>A - Project Particulars</i>	2
2	<i>C - Project Technical Specifications</i>	3 - 6
3	<i>ANNEXURE A: Pricing summary Dip tank 1 + 2</i>	7
4	<i>ANNEXURE B : Payment Schedule</i>	8
5	<i>ANNEXURE C : Additional Information</i>	9
6	<i>ANNEXURE D1: Schedule of Estimated Quantities Diptank</i>	10
7	<i>ANNEXURE F: Pro Forma Payment Certificate</i>	11 - 12
8	<i>DRAWING 1: Standard Dip tank plan</i>	DR01
09	<i>DRAWING 2: MBB Layout Plan of Cattle Dip Tank</i>	DR02
10	<i>MAP OF THE AREA : With Coordinates</i>	DR02



A - PROJECT PARTICULARS

1) PROJECT DESCRIPTION / BACKGROUND

The project covers the supply of material, fittings & construction of a cattle dip tank and associated animal handling facilities at Umhlabuyalingana Local office, EMtimbane Area under Inkosi Tembe (Ward 12).

The works include the excavation of the pit(s) (holes) according to specification on the plan, construction of the reinforced concrete lining of the pits and dry races using approved methods, construction of the crush pen, bypass and entrance kraal with poles. It also includes the casting of concrete in the kraal area as well as the entrances and exit areas of the bypass. Please refer to the attached **typical cattle dip tank plan**.

2) LOCATION

- **Name of dip tank :Gazini Dip Tank**
- **Location and road access: Mtimbane Area**
- **Co-ordinates: S-26° 54' 27.35" , E-32° 39' 17.66"**

For exact location see attached map DR 02.

3) SCOPE

The contract covers the supply of all material and fitting and construction of all works relating to the new dip tank and animal handling facilities. The following are the detailed scope of works for the **new dip tank and animal handling facilities**: Details of these works are specified in *Section C: Project Technical Specifications*.

- **Site selection and establishment;**
- **Earthworks:** Excavate the pits to desired depth and width using suitable methods. Accuracy regarding the exit slope is very important. To ensure maximum accuracy final preparation must be done using picks and spades. See specifications and drawings.
- **Steel work:** the bending schedule for reinforcing the tanks is supplied with drawing and is to be followed precisely. This must be inspected and approved by the supervising engineer or his delegated representative. The base of the tanks must be prepared and cast first before any other concrete work is carried out. The base reinforcement must protrude from the base to ensure proper tying of the side wall reinforcing.
- **Form work:** pre-cut 20mm shutter boards must be used to do the form work. It must be supported in such a way that when casting commences, no "kick out" occurs. Form work must be inspected by the supervising engineer or his delegated representative before casting commences. Shuttering should be treated so that the concrete does not stick to it.
- **Concrete work:** mechanical concrete vibrator (petrol driven) must be used at all times and concrete should be cast in manageable amounts. If any defects occur, it must be patched to match the same finishing when the shuttering is removed.
- **Poles-** only **pressure treated creosoted SABS** approved standard poles to be used.
- **Strength of concrete** – 30MPa
- **Cover to reinforcement** = 40mm



- **Chamfer:** all sharp exposed edges to have **chamfer** of 25mm x 25mm.

C) PROJECT TECHNICAL SPECIFICATIONS

1) CONTRACT SCOPE

Construction of a new dip tank and animal handling facilities as indicated in Section A: Project Particulars, clause 1. This is also the Pricing Schedules that has to be completed under ANNEXURE D (PRICING SCHEDULE)

- a. Supply and delivery all materials required for the structure.
- b. Excavation of the pit, steel and form work, lining the pit with the prescribed concrete.
- c. Casting and construction of the exit slope and dry race.
- d. Digging holes for the pole work, planting, aligning the poles to form the crush, bypass and kraal, bracing of the poles as per plan and fitting of neck clamp. Backfilling and compacting the soil around the poles.
- e. Clearing the sites from all rubble, spreading the excess soil from the pit and clear site of all excess material.

2) PRELIMINARIES AND GENERAL

The contractor is to note that all insurances (UIF, workman's compensation, works, public liability etc.); site and equipment safety; site establishment and security; services (water and electricity); testing of materials and any specialist services are for the contractors responsibility and attention throughout the contract duration until handover of the project. Please also refer to general conditions of contract. The Department reserves the right to stop progress of the works until these conditions are complied with.

3) EARTHWORKS AND SITE PREPARATIONS

Normal regulations regarding safety, municipal by-laws, contamination of water sources, erosion, siltation etc. will still apply.

- Site preparations & establishment: **SABS 1200 AA (4)**
 - Setting out of works: **SABS 1200 AA (5.1.1)**
 - Permissible deviations: **SABS 1200 GA (6.4)** Degree of accuracy II for all bases.
 - Restricted Excavations: **SABS 1200 AA (5); SABS 1200 DA (5.1; 5.2.2)**
- .1 The site(s) must be cleared and stripped of all plant materials, roots and topsoil.
 - .2 The cleared and stripped material is to be stockpiled away from the construction site and is to be levelled/replaced once all construction is complete.
 - .3 The site(s) is/are to be levelled prior to any construction. This includes excavation of in situ material to provide the pit.
 - .4 Materials excavated and suitable for backfilling will be placed in even, thin layers and compacted with thickness applicable to the compaction method/machinery used but not exceeding 150mm.

4) MATERIALS AND CONSTRUCTION

All materials must conform to SABS specifications for the products. This includes all items such as bricks, blocks, brick reinforcement, damp proofing, lintels, glazing, plumbing and drainage etc... All construction works must conform to the applicable standard specifications and installation requirements as per NBR requirements and manufacturers



recommendations. All concrete works to conform to Cement & Concrete Institute standards and recommendations.

Steel shuttering must be used except for the bottom 1300 mm where steel shuttering is unable to accommodate the inside shape of the tank. Only a maximum of 500 mm of casting will be allowed and a minimum of 3 days will be allowed for curing before shuttering can be removed. Adequate support must be provided for shuttering to prevent buckling, twisting and bulging.

5) STANDARD CONCRETE MIXES:

Mixing, pouring and curing of concrete: SABS 1200 GA (5.4)

Materials: SABS 1200 AA (3); SABS 1200 GA (3)

Cement : Common cement 32,5N or R to SANS 50197-1

Testing: SABS 1200 AA (7); SABS 1200 GA (7)

Quality control through the slump test SABS 1200 GA (5.4.1.2) SABS method 862. The contractor is to supply the slump testing equipment.

Tolerances to SABS 1200 GA (6.4)

Formwork: Refer to SABS 1200 GA (4.4; 5.2)

Reinforcing: SABS 1200 GA (5.1)

Refer to standard concrete mixes specification.

STANDARD CONCRETE MIXES:

Concrete for non-structural purposes shall be "Prescribed mix concrete" produced in accordance with the requirements indicated in table 5.1, and the Contractor is also referred to the foregoing preambles insofar as they apply: -

Class of Concrete	Estimated Minimum Compressive Strength in MPA at 28 Days	Maximum Nominal Size of Coarse Aggregate in mm	Proportion of Constituents		
			Cement (Parts)	Fine Aggregate (Parts)	Coarse Aggregate (Parts)
A	10	37,5	1 (=2 bags)	4	5
B	15	19,0	1 (=2 bags)	3	4
C	20	19,0	1 (=2 bags)	2½	3½
D	25	19,0	1 (=2 bags)	2	3
E	30	19,0	1 (=2 bags)	2	2½

Cement and aggregates shall be mixed by volume and the contents of a 50kg sack of cement shall be taken to be 0,033m³. Water addition should be kept to a minimum. Only sufficient water should be used to produce a workable mix of 60-100mm slump. A recommended maximum water: cement ratio is 1 for a 10Mpa; 0.8 for a 15Mpa; 0.65 for a 20Mpa; 0.59 for a 25Mpa; 0.53 for a 30Mpa mix, however the lower the ratio the better the durability of the concrete. Approximately 210 litres per m³ of concrete is required for an average quality sand and optimum quantity 19mm stone.

FINISHES TO IN-SITU CONCRETE

Class U1 Ordinary Finish

Immediately after placing, the concrete shall be finished rough by screeding with the edge of a wooden board of straight and true line and working between guides set accurately to level. No mortar shall be added and noticeable surface irregularities caused by the displacement of coarse aggregate shall be made good by re-screeding after removing or tamping down the offending aggregate.

**Class U2 Wood Float Finish**

The concrete surface shall first be brought to the standard Class U1 ordinary finish and then floated with a wood float. Floating shall be started as soon as the screeded finish is stiffened sufficiently and bleed water has evaporated or been removed and it shall be the minimum necessary to produce a surface free from screed marks and uniform in texture.

Class U3 Coarse Brush Surface Finish

The concrete surface shall first be brought to a Class U1 ordinary finish. A coarse brush finish is then applied with a coarse bristle brush. "Brushing" shall be started soon after screeding to produce a uniform patterned coarse surface finish with a rough surface texture in the direction of the desired drainage direction.

Class U4 Steel Float Finish

The concrete surface shall first be brought to the standard Class U1 ordinary finish and then floated with a steel power float. Floating shall be started as soon as the screeded finish is stiffened sufficiently and bleed water has evaporated or been removed and it shall be the minimum necessary to produce a surface free from screed marks and uniform in texture.

MORTAR CLASS	MIX RATIO: (By Volume)	MASONRY CEMENT: kg	LIME: L	SAND: (loose and damp) L (max)
I	1 : 4	50	0-10	130
II	1 : 6	50	0-40	200
PLASTER CLASS	MIX RATIO: (By Volume)	MASONRY CEMENT: kg	LIME: L	SAND: (loose and damp) L (max)
Rich mix (foundations, wet areas)	1 : 4	50	0-10	130
General purpose	1 : 5	50	0-40	165

6) FILLING OF THE DIPTANK

- .1 After completion the dip tank should be filled with 17,000 litres of clean water. This water should be clear and visibly free of dissolved particles or pollution (vegetation, soil, animal or human waste), but need not be purified or treated.
- .2 The source of the water depends on the location of the site.
Two methods could be used:
 - The tank is filled with water brought in by one or more water tankers. If this is the case the contractor can claim the invoiced amount from the water supplier and will receive a mark-up of the percentage indicated in item 8.1 of ANNEXURE D: the Schedule of Quantities/Pricing schedule. If THE INVOICE exceeds R 25,000 the contractor will have to prove that the invoice is reasonable and market related, for example, by submission of three quotes.
 - The tank is filled with water pumped from a borehole, dam or other water source. In this case the standard compensation (item 8.2) will be R 3000. Contractor to provide a mark-up.
- .3 ***Both options in the pricing schedule should be priced in case water availability is not known. If the water availability is known, the option not applicable should be scratched out at the site/bid briefing.***
- .4 ***Please note that only the amount for the applicable option will be paid out.***

7) SAFETY PRECAUTIONS ON SITE DURING CONSTRUCTION

- .1 One 5kg ozone friendly fire extinguisher and 1 fully fitted 1st aid box is to be available at all times.



- .2 All safety equipment required to construct the facility are for the contractor's responsibility and provisioning. Examples include: safety and protective clothing; sound scaffolding; false work and bracing; ladders etc... all equipment, tools and safety equipment are to be in a safe operating condition and must be used by the workers where appropriate.
- .3 Refer to general conditions for site safety as included in the regulations of the ***Occupational Health and Safety Act, 1993 (Act No. 85 of 1993)***. Site operations and conditions requiring special attention include but are not limited to:
 - Equipment, machinery, tools: (stationary or mobile) such as vehicles, generators, pumps, drills, augers, picks, spades, hand tools, ladders, scaffolding to be in a safe operating condition and are to be used in a safe and responsible manner. The contractor is responsible for all such monitoring and control of site operations and equipment throughout the works for the entire contract duration.
 - Lifting and lowering of materials or personnel in any way whatsoever.
 - Personnel access and operations at raised levels or on raised platforms or scaffolding.
 - Excavation works and holes are to be clearly indicated to prevent injury to personnel.
 - Potential ingress of water on/through the site.
 - Potentially hazardous services may be present on site such as water and sewerage mains, electricity cables etc...
 - Chemical transport, storage and usage whatsoever – this includes chemical contact through equipment use such as fuels and oils; materials such as creosote, paints, solvents, cement, concrete...
 - Barriers and safety cordons, safety and warning signage, sirens, lighting etc. as required
 - Safety equipment: Safety and protective clothing, gloves, goggles, masks, hard hats, boots, harnesses etc.
 - A first aid box is to be provided and available at all times on site during working hours and is to comply with the requirements of the Occupational Health and Safety Act.
 - Additional risks associated with specific methods of construction selected by the contractor which are not necessarily covered in the above.

8 TOILET FACILITIES

- .1 Contractor to provide his own toilet facilities in compliance with the ***Occupational Health and Safety Act, 1993 (Act No. 85 of 1993)***.

**ANNEXURE A : Pricing Summary New Dip Tank**

>>>> Bring forward amounts of page 22.

ITEM #	DESCRIPTION	Sub Total Value Grand Total @
1	Umhlabuyalingana Local office Gazini Dip Tank Location: District, Local Municipality along Dip tank and animal handling facilities (sub-total from Annexure D1)	Sub total Page 22 R.....
<i>Amount to be used for comparison of bids by SCM</i> <<< SUB TOTAL (A)		R
VAT (15%)		R
<i>Order value</i> << TOTAL		R

**ANNEXURE B : Work Phases Schedule for the Construction of a New Dip Tank**

Please note these values are primarily estimates of what part the work phase constitutes of the entire project, and do NOT reflect the exact amounts per part payment. Usually payment certificates reflect work done in several work phases, which do not necessarily have been completed.

Work phase No.	PHASE DESCRIPTION	App. % of work/ contract
1	<p>Preliminary and general/Site establishment 1) Insurances, project risk, workman's compensation, UIF etc... 2) Project administration, services, external services, testing, safety, provision of all required equipment for works at required times etc... 3) Site preparation and establishment.</p> <p>Excavation of dip tank hole see Item 10, Annexure D</p>	10%
2	Completion of concrete work for dip tank hole, Items 11, 12 and 13, Annexure D	25%
3	Excavation and Concrete work for dry race and kraal entrance	15%
4	Pole work and associated excavation and concrete work including by-pass entrance and exit (all pole holes , planting, compacting and bracing of poles, fitting of neck-clamp)	40%
5	Retention money 10% at final completion after 90 days	10%
	TOTAL	100%

**ANNEXURE C :****Additional Information**

- Failure to provide the information required below will make it impossible to score enough points to pass the functionality assessment the bid in terms of ANNEXURE E.
- Use additional pages if the space offered below does not sufficient.

1. EQUIPMENT & RESOURCES

Provide an indication of the equipment & resources which will be utilised to execute the services required.

#	EQUIPMENT & RESOURCES INTENDED TO BE USED TO IMPLEMENT THE WORKS	OWNED/HIRED/LEASED?
1		
2		
3		
4		
5		

2. EXPERIENCE

Please indicate your experience and expertise by completing the table. All Contractors need to prove that they have done dip tanks or similar work, i.e reinforced concrete works, in order to be considered.

#	NAME OF PROJECT + PERIOD	PROJECT DESCRIPTION <i>with particular reference to reinforced concrete applications</i>	ROLE (SELF OR SUB-CONTRACTED)	PROJECT VALUE	NAME AND CONTACT NUMBER OF REFEREE
1					
2					
3					
4					
5					

3. SUB CONTRACTED WORKS

Please list which parts of the works for this Bid will be sub-contracted.

#	Sub Contractor	Associated works	Percentage
1			
2			
3			
4			
5			



ANNEXURE D1: PRICING SCHEDULE –GAZINI DIPTANK

>> A copy of this Pricing Schedule is to be attached at every claim

Name of Dip tank:			Location:		
ITEM	DESCRIPTION	UNIT	QTY	Rate (Excl. VAT)	Amount (Excl. VAT)
1 PRELIMINARY AND GENERAL/SITE ESTABLISHMENT					
1.1	Insurance, project risk, workman's compensation, UIF. Project admin, provision of required equipment. Testing, safety, site establishment and site preparation, OSH reqs.	Sum	1		
2 EARTHWORKS					
2.1	Site clearance (removal of top 150mm of dip tank area & replacement where required)	m ²	200		
2.2	Levelling of site where required and excavation of tank and drying race (crush pen) to specified slope.	Sum	1		
2.3	Excavation of the tank hole	m ³	28		
2.4	Restricted backfill to 93% Mod AASHTO behind dip tank walls	m ³	20		
2.5	Cart away surplus material to spoil	Sum	1		
2.6	E/O for rock (use of this item must be verified and approved by the Engineer)	m ³	3		
3 CONCRETE					
3.1	30 MPa concrete	m ³	28		
4 POLES					
4.1	2.40m x 100-125mm Ø Posts	No.	85		
4.2	2.70m x 100-125mm Ø Posts	No.	35		
4.3	4.80m x 100-125mm Ø Posts	No.	125		
5 STEEL REINFORCEMENT					
5.1	R 10 x 0.350m - Pole bracing	No.	380		
5.2	R 10 x 1.625m – Pole bracing	No.	15		
5.3	Ref 311 mesh - 6m x 2.4m sheet for concrete	No.	4		
5.4	Ref 500 mesh – 6m x 2.4m sheet for concrete	No.	16		
5.5	R 8 (75m in total).See bending Schedule. Bars of 6m length	No.	13		
5.6	Y10 x 2.6m (See bending Schedule)	No.	1		
5.7	800mm x 102mm x 76mm x 10mm angle iron	No.	1		
6 STONE PITCHING					
6.1	Stone	m ²	10		
7 SHUTTERING AND FINISHING					
7.1	Formwork in small works etc. Rough formwork (incl. narrow widths and raking)	m ²	19		
7.2	Smooth formwork (incl. narrow widths and raking)	m ²	148		
7.3	U2 finish to base of tank, steps and drying race	m ²	33		
7.4	U4 finish to tops of walls	m ²	3.1		
8 FILLING OF THE TANK > See Section C, clause 6). Both options to be priced, but only applicable 1 to be claimed					
8.1	Option 1: Tank is filled with one or more water tankers	Sum	1		
8.2	Option 2: Tank is filled by pumping water from a nearby dam, bore hole or other water source.	Sum	1		
SUBTOTAL ITEMS 1-8					R
9 ANCILLARY MATERIALS, SERVICES & EQUIPMENT					
9.1	Ancillary Materials, Services & Equipment 10% of subtotal for items 1-8	Sum	1		
<<< (Amount to be carried forward to Annexure A)			TOTAL EXCL VAT	R	

**ANNEXURE E****ANNEXURE F: PRO FORMA PAYMENT CERTIFICATE FOR DIPTANKS**

Name of Dip tank:				Location:			
Claimant:				Date:		Claim No.	
Payment No.							
A	B	C	D	E	F	G	H
ITEM	DESCRIPTION	UNIT	QTY	Rate (Excl. VAT)	Amount	% Completed	Claim (F x G)
1 PRELIMINARY AND GENERAL/SITE ESTABLISHMENT							
1.1	Insurance, project risk, workman's compensation, UIF. Project admin, provision of required equipment. Testing, safety, site establishment and site preparation, OSH reqs.	Sum	1				
2 EARTHWORKS							
2.1	Site clearance (removal of top 150mm of dip tank area & replacement where required)	m ²	200				
2.2	Levelling of site where required and excavation of tank and drying race (crush pen) to specified slope.	Sum	1				
2.3	Excavation of the tank hole	m ³	28				
2.4	Restricted backfill to 93% Mod AASHTO behind dip tank walls	m ³	20				
2.5	Cart away surplus material to spoil	Sum	1				
2.6	E/O for rock (<i>use of this item must be verified & approved by the Engineer</i>)	m ³	3				
3 CONCRETE							
3.1	30 MPa concrete	m ³	28				
4 POLES							
4.1	2.40m x 100-125mm Ø Posts	No.	85				
4.2	2.70m x 100-125mm Ø Posts	No.	35				
4.3	4.80m x 100-125mm Ø Posts	No.	125				
5 STEEL REINFORCEMENT							
5.1	R 10 x 0.350m - Pole bracing	No.	380				
5.2	R 10 x 1.625m – Pole bracing	No.	15				
5.3	Ref 311 mesh - 6m x 2.4m sheet for concrete	No.	4				
5.4	Ref 500 mesh – 6m x 2.4m sheet for concrete	No.	16				
5.5	R 8 (75m in total). See bending Schedule. Bars of 6m length	No.	13				
5.6	Y10 x 2.6m (See bending Schedule)	No.	1				
5.7	800mm x 102mm x 76mm x 10mm angle iron	No.	1				
6 STONE PITCHING							



6.1	Stone	m ²	10				
A	B	C	D	E	F	G	H
ITEM	DESCRIPTION	UNIT	QTY	Rate (Excl. VAT)	Amount	% Completed	Claim (F x G)
7 SHUTTERING AND FINISHING							
7.1	Formwork in small works etc. Rough formwork (incl. narrow widths and raking)	m ²	19				
7.2	Smooth formwork (incl. narrow widths and raking)	m ²	148				
7.3	U2 finish to base of tank, steps and drying race	m ²	33				
7.4	U4 finish to tops of walls	m ²	3.1				
8 FILLING OF THE TANK > See Section C, clause 6). Both options to be priced, but only applicable 1 to be claimed							
8.1	Option 1: Tank is filled with one or more water tankers	Sum	1				
8.2	Option 2: Tank is filled by pumping water from a nearby dam, bore hole or other water source.	Sum	1				
9 ANCILLARY MATERIALS, SERVICES & EQUIPMENT							
9.1	Ancillary Materials, Services & Equipment (Contingencies) <i>PLEASE NOTE</i> <i>Only pre-approved items will be paid from this. This item may therefore not be claimable in its entirety.</i>	Sum	1				
SUB-TOTAL EXCL VAT							
SUBTRACT: TOTAL OF PREVIOUS CLAIMS>>>							
TOTAL THIS CLAIM EX VAT							
SUBTRACT 10% RETENTION >>>							
TOTAL EX VAT							
VAT							
15 %							
TOTAL AMOUNT OF THIS CLAIM							

DECLARATION OF INTEREST

1. Any legal person, including persons employed by the state¹, or persons having a kinship with persons employed by the state, including a blood relationship, may make an offer or offers in terms of this invitation to bid (includes an advertised competitive bid, a limited bid, a proposal or written price quotation). In view of possible allegations of favouritism, should the resulting bid, or part thereof, be awarded to persons employed by the state, or to persons connected with or related to them, it is required that the bidder or his/her authorised representative declare his/her position in relation to the evaluating/adjudicating authority where-

- the bidder is employed by the state; and/or
- the legal person on whose behalf the bidding document is signed, has a relationship with persons/a person who are/is involved in the evaluation and or adjudication of the bid(s), or where it is known that such a relationship exists between the person or persons for or on whose behalf the declarant acts and persons who are involved with the evaluation and or adjudication of the bid.

2. **In order to give effect to the above, the following questionnaire must be completed and submitted with the bid.**

2.1 Full Name of bidder or his or her representative:

.....

2.2 Identity Number:

.....

2.3 Position occupied in the Company (director, trustee, shareholder², member):

.....

2.4 Registration number of company, enterprise, close corporation, partnership agreement or trust:

.....

2.5 Tax Reference Number:

.....

2.6 VAT Registration Number:

.....

2.6.1 The names of all directors / trustees / shareholders / members, their individual identity numbers, tax reference numbers and, if applicable, employee / PERSAL numbers must be indicated in paragraph 3 below.

1"State" means –

- (a) any national or provincial department, national or provincial public entity or constitutional institution within the meaning of the Public Finance Management Act, 1999 (Act No. 1 of 1999);
- (b) any municipality or municipal entity;
- (c) provincial legislature;
- (d) national Assembly or the national Council of provinces; or
- (e) Parliament.

2"Shareholder" means a person who owns shares in the company and is actively involved in the management of the enterprise or business and exercises control over the enterprise.

Please clearly indicate, with an 'X' only one box that is applicable to your business or firm

2.7 Are you or any person connected with the bidder presently employed by the state?

YES	NO
-----	----

2.7.1 If so, furnish the following particulars:

Name of person / director / trustee / shareholder/member:

.....

Name of state institution at which you or the person connected to the bidder is employed

.....

Position occupied in the state institution:

.....

Any other particulars:

.....

2.7.2 If you are presently employed by the state, did you obtain

YES	NO
-----	----

the appropriate authority to undertake remunerative work outside employment in the public sector?

If yes, did you attach proof of such authority to the bid document?

YES	NO
-----	----

(Note: Failure to submit proof of such authority, where applicable, may result in the disqualification of the bid.)

2.7.2.1 If no, furnish reasons for non-submission of such proof:

.....

.....

2.8 Did you or your spouse, or any of the company's directors / trustees / shareholders / members or their spouses conduct business with the state in the previous twelve months?

YES	NO
-----	----

2.8.1 If so, furnish particulars:

.....
.....

2.9 Do you, or any person connected with the bidder, have any relationship (family, friend, other) with a person employed by the state and who may be involved with the evaluation and or adjudication of this bid?

YES	NO
-----	----

2.9.1 If so, furnish particulars.

.....
.....

2.10 Are you, or any person connected with the bidder, aware of any relationship (family, friend, other) between any other bidder and any person employed by the state who may be involved with the evaluation and or adjudication of this bid?

YES	NO
-----	----

2.10.1 If so, furnish particulars.

.....
.....

2.11 Do you or any of the directors / trustees / shareholders / members of the company have any interest in any other related companies whether or not they are bidding for this contract?

YES	NO
-----	----

2.11.1 If so, furnish particulars:

.....
.....

CERTIFICATE OF INDEPENDENT BID DETERMINATION

- 1 This Standard Bidding Document (SBD) must form part of all bids¹ invited.
- 2 Section 4 (1) (b) (iii) of the Competition Act No. 89 of 1998, as amended, prohibits an agreement between, or concerted practice by, firms, or a decision by an association of firms, if it is between parties in a horizontal relationship and if it involves collusive bidding (or bid rigging).² Collusive bidding is a *per se* prohibition meaning that it cannot be justified under any grounds.
- 3 Treasury Regulation 16A9 prescribes that accounting officers and accounting authorities must take all reasonable steps to prevent abuse of the supply chain management system and authorizes accounting officers and accounting authorities to:
 - a. disregard the bid of any bidder if that bidder, or any of its directors have abused the institution's supply chain management system and or committed fraud or any other improper conduct in relation to such system.
 - b. cancel a contract awarded to a supplier of goods and services if the supplier committed any corrupt or fraudulent act during the bidding process or the execution of that contract.
- 4 This SBD serves as a certificate of declaration that would be used by institutions to ensure that, when bids are considered, reasonable steps are taken to prevent any form of bid-rigging.
- 5 In order to give effect to the above, the attached Certificate of Bid Determination (SBD 9) must be completed and submitted with the bid:

¹ Includes price quotations, advertised competitive bids, limited bids and proposals.

² Bid rigging (or collusive bidding) occurs when businesses, that would otherwise be expected to compete, secretly conspire to raise prices or lower the quality of goods and / or services for purchasers who wish to acquire goods and / or services through a bidding process. Bid rigging is, therefore, an agreement between competitors not to compete.

CERTIFICATE OF INDEPENDENT BID DETERMINATION

I, the undersigned, in submitting the accompanying bid:

(Bid Number and Description)

in response to the invitation for the bid made by:

(Name of Institution)

do hereby make the following statements that I certify to be true and complete in every respect:

I certify, on behalf of _____ that:

(Name of Bidder)

1. I have read and I understand the contents of this Certificate;
2. I understand that the accompanying bid will be disqualified if this Certificate is found not to be true and complete in every respect;
3. I am authorized by the bidder to sign this Certificate, and to submit the accompanying bid, on behalf of the bidder;
4. Each person whose signature appears on the accompanying bid has been authorized by the bidder to determine the terms of, and to sign the bid, on behalf of the bidder;
5. For the purposes of this Certificate and the accompanying bid, I understand that the word "competitor" shall include any individual or organization, other than the bidder, whether or not affiliated with the bidder, who:
 - (a) has been requested to submit a bid in response to this bid invitation;
 - (b) could potentially submit a bid in response to this bid invitation, based on their qualifications, abilities or experience; and
 - (c) provides the same goods and services as the bidder and/or is in the same line of business as the bidder
6. The bidder has arrived at the accompanying bid independently from, and without consultation, communication, agreement or arrangement with any competitor. However communication between partners in a joint venture or consortium³ will not be construed as collusive bidding.

7. In particular, without limiting the generality of paragraphs 6 above, there has been no consultation, communication, agreement or arrangement with any competitor regarding:
- (a) prices;
 - (b) geographical area where product or service will be rendered (market allocation)
 - (c) methods, factors or formulas used to calculate prices;
 - (d) the intention or decision to submit or not to submit, a bid;
 - (e) the submission of a bid which does not meet the specifications and conditions of the bid; or
 - (f) bidding with the intention not to win the bid.
8. In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications and conditions or delivery particulars of the products or services to which this bid invitation relates.
9. The terms of the accompanying bid have not been, and will not be, disclosed by the bidder, directly or indirectly, to any competitor, prior to the date and time of the official bid opening or of the awarding of the contract.
10. I am aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to bids and contracts, bids that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act No 89 of 1998 and or may be reported to the National Prosecuting Authority (NPA) for criminal investigation and or may be restricted from conducting business with the public sector for a period not exceeding ten (10) years in terms of the Prevention and Combating of Corrupt Activities Act No 12 of 2004 or any other applicable legislation.

.....
Signature

.....
Date

.....
Position

.....
Name of Bidder